

## MONO MODULE

JST210M(36) 210W



High conversion efficiency  
High module efficiency to guarantee power output.



Self-cleaning glass  
Coating glass for self-cleaning, reduce surface dust.



Outstanding low irradiation performance  
Excellent module efficiency even in the weak light conditions, such as morning or cloudy.




Excellent loading capability  
2400Pa wind loads, 5400Pa snow loads.



0 to +5W positive tolerance  
Detailed information in Electrical Specifications.



48-hour response service

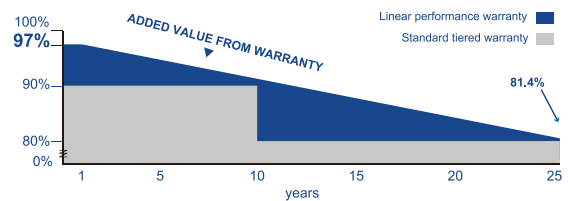

25-year performance warranty



10-year warranty on materials and workmanship



GRUPO CYMASOL RENOVABLES S.L.

[www.cymasol.com](http://www.cymasol.com)

[venta@cymasol.com](mailto:venta@cymasol.com)

## ELECTRICAL DATA

Model Type	JST210M
Peak Power (Pmax)	210W
Module Efficiency	19.61%
Maximum Power Voltage (Vmp)	18.70V
Maximum Power Current (Imp)	10.70A
Open Circuit Voltage (Voc)	22.80V
Short Circuit Current (Isc)	11.24A
Power Tolerance	0 to +5W
Maximum System Voltage	1000V
Nominal Operating Cell Temperature	44.4±2°C
Maximum Series Fuse Rating	10A

## MECHANICAL DATA

Cell Type	158.75×158.75mm
Number of Cells	36 (9×4)
Weight	11.5kg
Dimension	1500×680×35mm
Max Load	5400 Pascals
Junction Box	IP67 rated
Connector	MC4 Compatible
Wire Type	PV Wire

## TEMPERATURE CHARACTERISTICS

Temp. Coeff. of Isc (TK Isc)	0.04% /°C
Temp. Coeff. of Voc (TK Voc)	-0.28% /°C
Temp. Coeff of Pmax (TK Pmax)	-0.37% /°C

## PACKING MANNER

Container	20' GP	40' HQ
Pieces per Pallet	30	30
Pieces per Container	500	1080

## PHYSICAL CHARACTERISTICS

